

PROHLÁŠENÍ O VLASTNOSTECH

DoP:

PD003

pro injektážní systém Pro Doma Vinlyester (Lepená kotva pro použití v
betonu) – CS

1. Jedinečný identifikační kód typu výrobku: **DoP: PD003**
2. Zamýšlené/zamýšlená použití: **Dodatečné upevnění v tažené a tlačené zóně betonu, viz. doplněk, obzvláště Přílohy B 1 - B 8**
3. Výrobce: **PRO-DOMA, SE, Budčická 1479, 190 00 PRAHA 9 – Újezd nad Lesy, ČESKÁ REPUBLIKA**
4. Zplnomocněný zástupce: --
5. Systém/systémy POSV: **1**
6. Evropský dokument pro posuzování: **EAD 330499-00-0601, 2017-07**
Evropské technické posouzení: **ETA-18/0487; 2018-07-04**
Subjekt pro technické posuzování: **DIBt**
Oznámený subjekt/oznámené subjekty: **2873 (TU Darmstadt)**
7. Deklarovaná vlastnost/Deklarované vlastnosti:
Mechanická odolnost a stabilita (BWR 1), Bezpečnost při použití (BWR 4)
 - Charakteristické hodnoty pod statickým a quasi-statickým namáháním, Posuny: Viz. doplněk, obzvláště Přílohy C 1 - C 6**Bezpečnost v případě požáru (BWR 2)**
 - Odolnost proti ohni: Kotvení splňuje požadavky Třídy A 1
 - Požární odolnost: VNS
8. Příslušná technická dokumentace a/nebo specifická technická dokumentace: ---
Vlastnosti výše uvedeného výrobku jsou ve shodě se souborem deklarovaných vlastností. Toto prohlášení o vlastnostech se v souladu s nařízením (EU) č. 305/2011 vydává na výhradní odpovědnost výrobce uvedeného výše.

Podepsáno za výrobce a jeho jménem:



Újezd nad Lesy, **2018-08-17**

- Toto PoV bylo připraveno v různých jazykových mutacích.. V případě rozporu vždy rozhoduje interpretace verze v anglickém jazyce.
- Příloha obsahuje nepovinné a doplňkové informace v anglickém jazyce na rámec zákonných požadavků.

Specific Part

1 Technical description of the product

The fischer injection system FIS VL is a bonded anchor consisting of a cartridge with injection mortar fischer FIS VL, FIS VL High Speed or FIS VL Low Speed and a steel element.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic values for static and quasi-static action, displacements	See Annex C 1 to C 6

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

3.4 Safety in use (BWR 4)

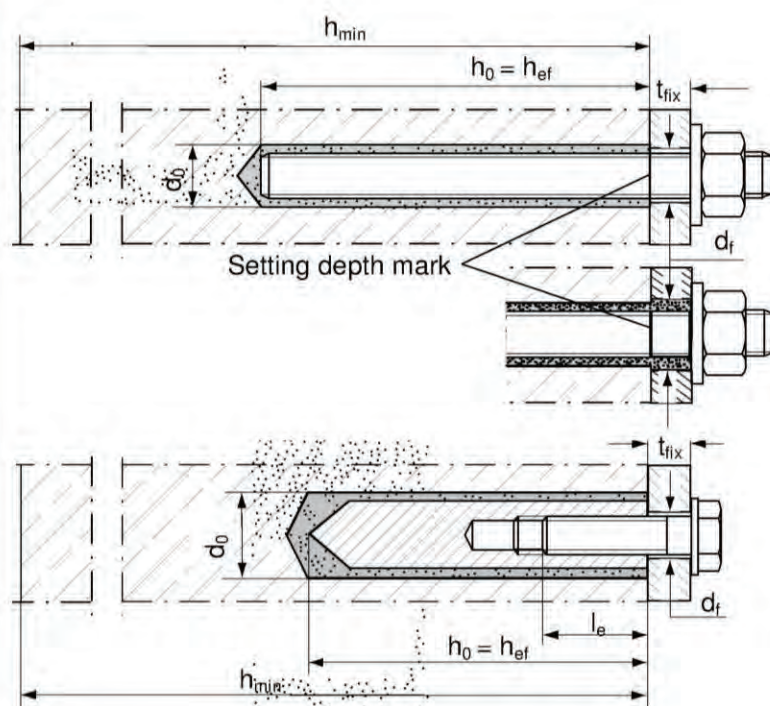
The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with guideline for European technical approval ETAG 001, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

Installation conditions



Anchor rod
Pre-positioned anchor

Anchor rod
Push through anchor
(annular gap filled with mortar)

fischer
internal threaded anchor RG MI
Pre-positioned anchor only

fischer injection system FIS VL

Product description
Installation conditions

Annex A 1

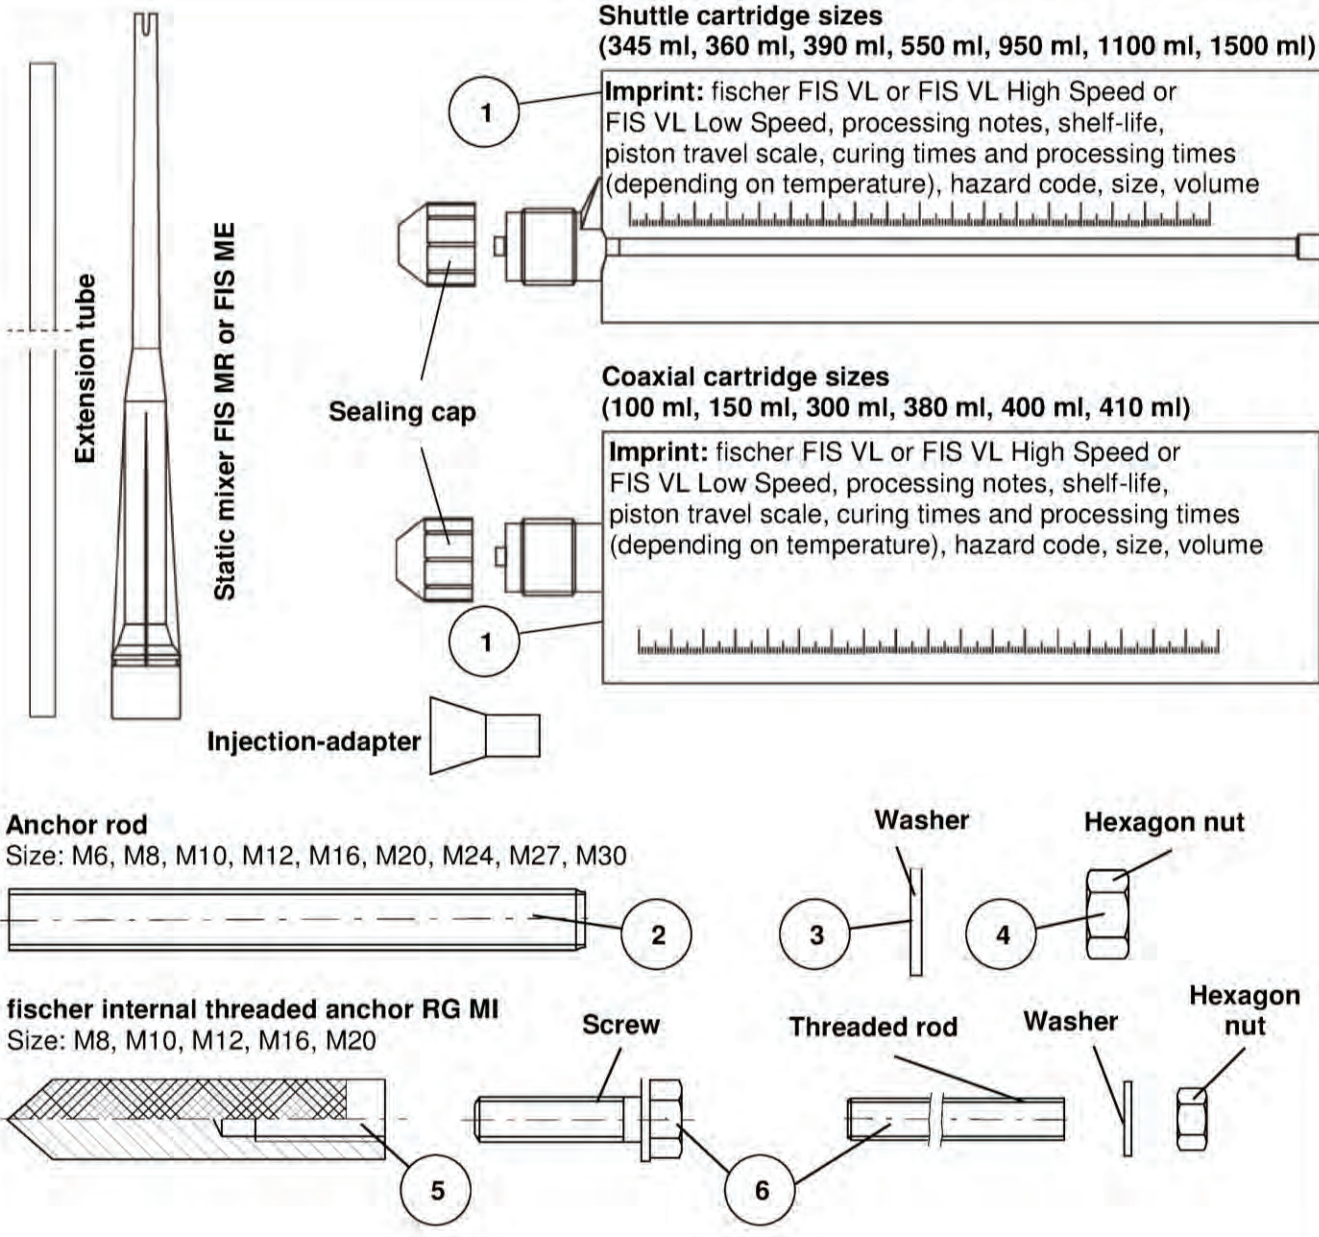
 Shuttle cartridge sizes (345 ml, 360 ml, 390 ml, 550 ml, 950 ml, 1100 ml, 1500 ml) Imprint: fischer FIS VL or FIS VL High Speed or FIS VL Low Speed, processing notes, shelf-life, piston travel scale, curing times and processing times (depending on temperature), hazard code, size, volume Coaxial cartridge sizes (100 ml, 150 ml, 300 ml, 380 ml, 400 ml, 410 ml) Imprint: fischer FIS VL or FIS VL High Speed or FIS VL Low Speed, processing notes, shelf-life, piston travel scale, curing times and processing times (depending on temperature), hazard code, size, volume Anchor rod Size: M6, M8, M10, M12, M16, M20, M24, M27, M30 fischer internal threaded anchor RG MI Size: M8, M10, M12, M16, M20	Annex A 2
fischer injection system FIS VL Product description Cartridges / Static mixer / Steel elements	

Table A1: Materials				
Part	Designation	Material		
1	Mortar cartridge	Mortar, hardener, filler		
	Steel grade	Steel, zinc plated	Stainless steel A4	High corrosion resistant steel C
2	Anchor rod	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated ≥ 5 µm, EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004 f _{uk} ≤ 1000 N/mm ² A ₅ > 8 % fracture elongation	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662, 1.4462 EN 10088-1:2014 f _{uk} ≤ 1000 N/mm ² A ₅ > 8 % fracture elongation	Property class 50 or 80 EN ISO 3506-1:2009 or property class 70 with f _{yk} = 560 N/mm ² 1.4565; 1.4529 EN 10088-1:2014 f _{uk} ≤ 1000 N/mm ² A ₅ > 8 % fracture elongation
3	Washer ISO 7089:2000	zinc plated ≥ 5 µm, EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004	1.4401; 1.4404; 1.4578;1.4571; 1.4439; 1.4362 EN 10088-1:2014	1.4565;1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2012 zinc plated ≥ 5 µm, ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
5	fischer internal threaded anchor RG MI	Property class 5.8 ISO 898-1:2013 zinc plated ≥ 5 µm, ISO 4042:1999 A2K	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
6	Commercial standard screw or anchor / threaded rod for fischer internal threaded anchor RG MI	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated ≥ 5 µm, ISO 4042:1999 A2K fracture elongation A ₅ > 8 %	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014 fracture elongation A ₅ > 8 %	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014 fracture elongation A ₅ > 8 %
fischer injection system FIS VL				Annex A 3
Product description Materials				

Specifications of intended use (part 1)**Table B1:** Overview use and performance categories

Anchorages subject to		FIS VL, FIS VL High Speed or FIS VL Low Speed with ...			
		Anchor rod 		fischer internal threaded anchor RG MI 	
Hammer drilling with standard drill bit 		all sizes			
Hammer drilling with hollow drill bit (Heller "Duster Expert" or Hilti "TE-CD, TE-YD") 		Nominal drill bit diameter (d ₀) 12 mm to 35 mm			
Static and quasi static load, in	uncracked concrete	M6 to M30	Tables: C1, C3, C4, C6	M8 to M20	Tables: C2, C3, C5, C7
	cracked concrete	M10 to M20		not assessed	
Use category	dry or wet concrete	M6 to M30		M8 to M20	
	flooded hole ¹⁾	M12 to M30		M8 to M20	
Installation temperature		-10 °C to +40 °C			
In-service temperature	Temperature range I	-40 °C to +80 °C	(max. long term temperature +50 °C and max. short term temperature +80 °C)		
	Temperature range II	-40 °C to +120 °C	(max. long term temperature +72 °C and max. short term temperature +120 °C)		
¹⁾ Only with coaxial cartridges: 380 ml, 400 ml, 410 ml					
fischer injection system FIS VL					Annex B 1
Intended Use Specifications (part 1)					

Specifications of intended use (part 2)

Base materials:

- Reinforced or unreinforced normal weight concrete Strength classes C20/25 to C50/60 according to EN 206-1:2000

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure, to permanently damp internal conditions or in other particular aggressive conditions (high corrosion resistant steel)

Note: Particular aggressive conditions are e. g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e. g. in desulphurization plants or road tunnels where de-icing materials are used)

Design:

- Anchorage have to be designed by a responsible engineer with experience of concrete anchor design
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorage under static or quasi-static actions are designed in accordance with EOTA Technical Report TR 029 "Design of bonded anchors" Edition September 2010 or CEN/TS 1992-4: 2009

Installation:

- Anchor installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- In case of aborted hole: The hole shall be filled with mortar
- Anchorage depth should be marked and adhered to on installation
- Overhead installation is allowed

fischer injection system FIS VL

Intended Use
Specifications (part 2)

Annex B 2

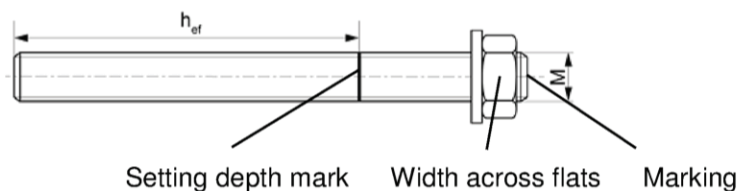
Table B2: Installation parameters for anchor rods

Size			M6	M8	M10	M12	M16	M20	M24	M27	M30	
Width across flats	SW	[mm]	10	13	17	19	24	30	36	41	46	
Nominal drill bit diameter	d ₀		8	10	12	14	18	24	28	30	35	
Drill hole depth	h ₀		h ₀ = h _{ef}									
Effective anchorage depth	h _{ef,min}		50	60	60	70	80	90	96	108	120	
	h _{ef,max}		72	160	200	240	320	400	480	540	600	
Minimum spacing and minimum edge distance	$\begin{matrix} s_{min} \\ = \\ c_{min} \end{matrix}$		40	40	45	55	65	85	105	125	140	
Diameter of clearance hole in the fixture ¹⁾	$\begin{matrix} \text{pre-} \\ \text{positioned} \end{matrix}$ d _f		7	9	12	14	18	22	26	30	33	
	$\begin{matrix} \text{push} \\ \text{through} \end{matrix}$ d _f		9	11	14	16	20	26	30	32	40	
Minimum thickness of concrete member	h _{min}		h _{ef} + 30 (≥ 100)				h _{ef} + 2d ₀					
Maximum installation torque	T _{inst,max}	[Nm]	5	10	20	40	60	120	150	200	300	


¹⁾ For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

Anchor rods:

**fischer
FIS A**



**fischer
RG M**



Marking (on random place) fischer anchor rod:

Property class 8.8, stainless steel A4 property class 80 and

high corrosion resistant steel C property class 80: •

Stainless steel A4 property class 50 and high corrosion resistant steel C property class 50: ••

Or colour coding according to DIN 976-1

Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

- Materials, dimensions and mechanical properties according Annex A 3, Table A1
- Inspection certificate 3.1 according to EN 10204:2004, the documents have to be stored
- Setting depth is marked

fischer injection system FIS VL

Intended Use

Installation parameters anchor rods

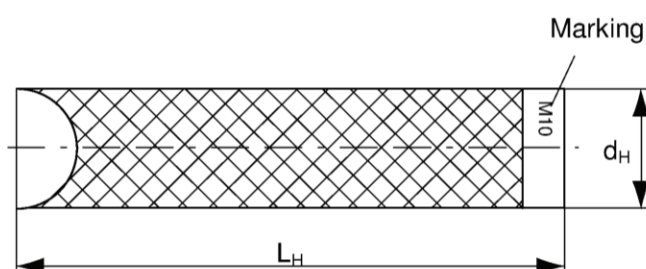
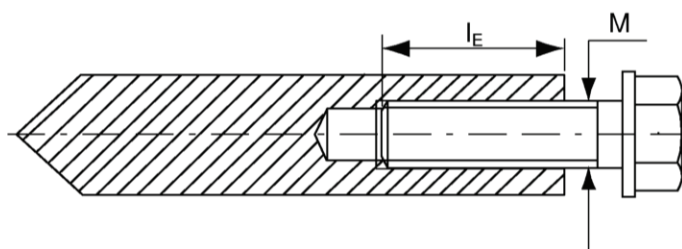
Annex B 3

Table B3: Installation parameters for fischer internal threaded anchors RG MI

Size		M8	M10	M12	M16	M20
Diameter of anchor	d_H	12	16	18	22	28
Nominal drill bit diameter	d_0	14	18	20	24	32
Drill hole depth	h_0	$h_0 = h_{ef} = L_H$				
Effective anchorage depth ($h_{ef} = L_H$)	h_{ef}	90	90	125	160	200
Minimum spacing and minimum edge distance	s_{min} = c_{min}	55	65	75	95	125
Diameter of clearance hole in the fixture ¹⁾	d_f	9	12	14	18	22
Minimum thickness of concrete member	h_{min}	120	125	165	205	260
Maximum screw-in depth	$l_{E,max}$	18	23	26	35	45
Minimum screw-in depth	$l_{E,min}$	8	10	12	16	20
Maximum installation torque	$T_{inst,max}$ [Nm]	10	20	40	80	120

¹⁾ For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1: 2009, 5.2.3.1

fischer internal threaded anchor RG MI



Marking: Anchor size
e. g.: **M10**

Stainless steel additional **A4**
e. g.: **M10 A4**

High corrosion resistant steel
additional **C**
e. g.: **M10 C**

Retaining bolt or threaded rods (including nut and washer) must comply with the appropriate material and strength class of Annex A 3, Table A1

fischer injection system FIS VL

Intended Use

Installation parameters fischer internal threaded anchors RG MI

Annex B 4

Table B4: Diameters of cleaning brush BS (steel brush)

The size of the steel brush refers to the nominal drill bit diameter

Nominal drill bit diameter	d_0		8	10	12	14	16	18	20	24	25	28	30	35
Steel brush diameter	d_b	[mm]	9	11	14	16	20		25	26	27	30	40	

**Table B5:** Maximum processing time of the mortar and minimum curing time

(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature)




System temperature [°C]	Maximum processing time t_{work}			Minimum curing time ¹⁾ t_{cure}		
	FIS VL High Speed	FIS VL	FIS VL Low Speed	FIS VL High Speed	FIS VL	FIS VL Low Speed
-10 to -5	---	---	---	12 h	---	---
> -5 to ± 0	5 min	---	---	3 h	24 h	---
> ± 0 to +5	5 min	13 min	---	3 h	3 h	6 h
> +5 to +10	3 min	9 min	20 min	50 min	90 min	3 h
> +10 to +20	1 min	5 min	10 min	30 min	60 min	2 h
> +20 to +30	---	4 min	6 min	---	45 min	60 min
> +30 to +40	---	2 min	4 min	---	35 min	30 min

¹⁾ In wet concrete or flooded holes the curing times must be doubled

fischer injection system FIS VL


Intended UseCleaning tools
Processing times and curing times**Annex B 5**

Installation instructions part 1**Drilling and cleaning the hole (hammer drilling with standard drill bit)**

1		Drill the hole. Drill hole diameter d_0 and drill hole depth h_0 see Tables B2, B3
2		Clean the drill hole: For $h_{ef} \leq 12d$ and $d_0 < 18$ mm blow out the hole four times by hand
3		Brush the drill hole four times. For deep holes use an extension. Corresponding brushes see Table B4
4		Clean the drill hole: For $h_{ef} \leq 12d$ and $d_0 < 18$ mm blow out the hole four times by hand

Go to step 5

Drilling and cleaning the hole (hammer drilling with hollow drill bit)


1		Check a suitable hollow drill (see Table B1) for correct operation of the dust extraction
2		Use a suitable dust extraction system, e. g. Bosch GAS 35 M AFC or a comparable dust extraction system with equivalent performance data Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Diameter of drill hole d_0 and drill hole depth h_0 see Tables B2, B3

Go to step 5

fischer injection system FIS VL




Intended use
Installation instructions part 1**Annex B 6**

Installation instructions part 2**Preparing the cartridge**

5		Remove the sealing cap Screw on the static mixer (the spiral in the static mixer must be clearly visible)
6		Place the cartridge into the dispenser
7		Extrude approximately 10 cm of material until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey

Go to step 8

Mörtelinjektion

8	 Fill approximately 2/3 of the drill hole with mortar. Always begin from the bottom of the hole and avoid bubbles	 For drill hole depth ≥ 150 mm use an extension tube	 For overhead installation, deep holes ($h_0 > 250$ mm) or drill hole diameter ($d_0 \geq 40$ mm) use an injection-adaptor
---	--	---	--

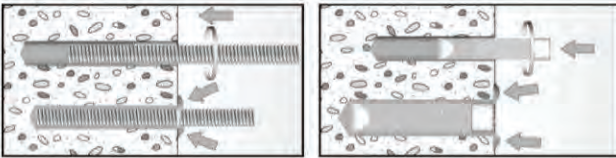




Go to step 9

fischer injection system FIS VL

Intended use
Installation instructions part 2

Annex B 7

Installation instructions part 3**Installation of anchor rods or fischer internal threaded anchors RG MI**

9		Only use clean and oil-free anchor elements. Mark the setting depth of the anchor. Push the anchor rod or fischer internal threaded RG MI anchor down to the bottom of the hole, turning it slightly while doing so. After inserting the anchor element, excess mortar must be emerged around the anchor element.		
	 For overhead installations support the anchor rod with wedges. (e. g. fischer centering wedges)	 For push through installation fill the annular gap with mortar		
10	 Wait for the specified curing time t_{cure} see Table B5	<td data-bbox="868 824 948 1005">11</td> <td data-bbox="948 824 1267 1005">  Mounting the fixture $T_{\text{inst,max}}$ see Tables B2 and B3 </td>	11	 Mounting the fixture $T_{\text{inst,max}}$ see Tables B2 and B3

fischer injection system FIS VL

Intended use
Installation instructions part 3

Annex B 8

Table C1: Characteristic values for the **steel bearing capacity** of **anchor rods** under tensile / shear load

Size				M6	M8	M10	M12	M16	M20	M24	M27	M30
Bearing capacity under tensile load, steel failure												
Charact.bearing capacity $N_{Rk,s}$	Steel zinc plated	5.8	[kN]	10	19	29	43	79	123	177	230	281
		8.8		16	29	47	68	126	196	282	368	449
	Stainless steel A4 and High corrosion resistant steel C	50		10	19	29	43	79	123	177	230	281
		70		14	26	41	59	110	172	247	322	393
		80		16	30	47	68	126	196	282	368	449
Partial safety factors ¹⁾												
Partial safety factor $\gamma_{Ms,N}$	Steel zinc plated	5.8	[-]	1,50								
		8.8		1,50								
	Stainless steel A4 and High corrosion resistant steel C	50		2,86								
		70		1,50 ²⁾ / 1,87								
		80		1,60								
Bearing capacity under shear load, steel failure												
without lever arm												
Charact.bearing capacity $V_{Rk,s}$	Steel zinc plated	5.8	[kN]	5	9	15	21	39	61	89	115	141
		8.8		8	15	23	34	63	98	141	184	225
	Stainless steel A4 and High corrosion resistant steel C	50		5	9	15	21	39	61	89	115	141
		70		7	13	20	30	55	86	124	161	197
		80		8	15	23	34	63	98	141	184	225
Ductility factor acc. to CEN/TS 1992-4-5:2009 Section 6.3.2.1		k_2	[-]	1,0								
with lever arm												
Charact. bending moment $M_{Rd,s}$	Steel zinc plated	5.8	[Nm]	7	19	37	65	166	324	560	833	1123
		8.8		12	30	60	105	266	519	896	1333	1797
	Stainless steel A4 and High corrosion resistant steel C	50		7	19	37	65	166	324	560	833	1123
		70		10	26	52	92	232	454	784	1167	1573
		80		12	30	60	105	266	519	896	1333	1797
Partial safety factors ¹⁾												
Partial safety factor $\gamma_{Ms,V}$	Steel zinc plated	5.8	[-]	1,25								
		8.8		1,25								
	Stainless steel A4 and High corrosion resistant steel C	50		2,38								
		70		1,25 ²⁾ / 1,56								
		80		1,33								
¹⁾ In absence of other national regulations ²⁾ Only for fischer FIS A and RG M made of high corrosion-resistant steel C												
fischer injection system FIS VL										Annex C 1		
Performances Characteristic steel bearing capacity anchor rods												

Table C2: Characteristic values for the **steel bearing capacity** of **fischer internal threaded anchors RG MI** under tensile / shear load

Size				M8	M10	M12	M16	M20	
Bearing capacity under tensile load, steel failure									
Characteristic bearing capacity with screw	$N_{Rk,s}$	Property class	5.8	[kN]	19	29	43	79	123
			8.8		29	47	68	108	179
		Property class	A4		26	41	59	110	172
		class 70	C		26	41	59	110	172
Partial safety factors ¹⁾									
Partial safety factor	$\gamma_{Ms,N}$	Property class	5.8	[-]	1,50				
			8.8		1,50				
		Property class	A4		1,87				
		class 70	C		1,87				
Bearing capacity under shear load, steel failure									
without lever arm									
Characteristic bearing capacity with screw	$V_{Rk,s}$	Property class	5.8	[kN]	9,2	14,5	21,1	39,2	62,0
			8.8		14,6	23,2	33,7	54,0	90,0
		Property class	A4		12,8	20,3	29,5	54,8	86,0
		class 70	C		12,8	20,3	29,5	54,8	86,0
Ductility factor acc. to CEN/TS 1992-4-5:2009 Section 6.3.2.1			k_2	[-]	1,0				
with lever arm									
Characteristic bending moment with screw	$M^0_{Rk,s}$	Property class	5.8	[Nm]	20	39	68	173	337
			8.8		30	60	105	266	519
		Property class	A4		26	52	92	232	454
		class 70	C		26	52	92	232	454
Partial safety factors ¹⁾									
Partial safety factor	$\gamma_{Ms,V}$	Property class	5.8	[-]	1,25				
			8.8		1,25				
		Property class	A4		1,56				
		class 70	C		1,56				
¹⁾ In absence of other national regulations									
fischer injection system FIS VL								Annex C 2	
Performances Characteristic steel bearing capacity of fischer internal threaded anchors RG MI									

Table C3: General design factors for the bearing capacity under tensile / shear load; uncracked or cracked concrete												
Size			All sizes									
Bearing capacity under tensile load												
Factors acc. to CEN/TS 1992-4:2009 Section 6.2.2.3												
Uncracked concrete		k_{ucr}	[-]	10,1								
Cracked concrete		k_{cr}		7,2								
Factors for the compressive strength of concrete > C20/25												
Increasing factor for τ_{Rk}	C25/30		Ψ_c	[-]	1,05							
	C30/37				1,10							
	C35/45				1,15							
	C40/50				1,19							
	C45/55				1,22							
	C50/60				1,26							
Splitting failure												
Edge distance	$h / h_{ef} \geq 2,0$		$c_{cr,sp}$	[mm]	1,0 h_{ef}							
	$2,0 > h / h_{ef} > 1,3$				4,6 h_{ef} - 1,8 h							
	$h / h_{ef} \leq 1,3$				2,26 h_{ef}							
Spacing		$s_{cr,sp}$			2 $c_{cr,sp}$							
Concrete cone failure acc. to CEN/TS 1992-4-5:2009 Section 6.2.3.2												
Edge distance		$c_{cr,N}$	[mm]	1,5 h_{ef}								
Spacing		$s_{cr,N}$		2 $c_{cr,N}$								
Bearing capacity under shear load												
Installation safety factors												
All installation conditions		$\gamma_2 = \gamma_{inst}$	[-]	1,2								
Concrete pry-out failure												
Factor k acc. to TR029 Section 5.2.3.3 resp. k_3 acc. to CEN/TS 1992-4-5:2009 Section 6.3.3		$k_{(3)}$	[-]	2,0								
Concrete edge failure												
The value of h_{ef} (= l_t) under shear load			[mm]	min (h_{ef} ; 8d)								
Calculation diameters												
Size				M6	M8	M10	M12	M16	M20	M24	M27	M30
Anchor rods		d	[mm]	6	8	10	12	16	20	24	27	30
fischer internal threaded anchors RG MI		d_{nom}		---	12	16	18	22	28	---	---	---
fischer injection system FIS VL											Annex C 3	
Performances General design factors relating to the characteristic bearing capacity under tensile / shear load												

Table C4: Characteristic values of **resistance** for **anchor rods** in hammer drilled holes; **uncracked or cracked concrete**

Size			M6	M8	M10	M12	M16	M20	M24	M27	M30
Combined pullout and concrete cone failure											
Calculation diameter	d	[mm]	6	8	10	12	16	20	24	27	30
Uncracked concrete											
Characteristic bond resistance in uncracked concrete C20/25											
<u>Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)</u>											
Temperature range	I: 50 °C / 80 °C II: 72 °C / 120 °C	$\tau_{Rk,ucr}$ [N/mm ²]	9,0 6,5	11,0 9,5	11,0 9,5	11,0 9,0	10,0 8,5	9,5 8,0	9,0 7,5	8,5 7,0	8,5 7,0
<u>Hammer-drilling with standard drill bit or hollow drill bit (flooded hole)¹⁾</u>											
Temperature range	I: 50 °C / 80 °C II: 72 °C / 120 °C	$\tau_{Rk,ucr}$ [N/mm ²]	--- ---	--- ---	--- ---	9,5 7,5	8,5 7,0	8,0 6,5	7,5 6,0	7,0 6,0	7,0 6,0
Installation safety factors											
Dry and wet concrete	$\gamma_2 = \gamma_{inst}$	[-]	1,2								
Flooded hole			---				1,4 ¹⁾				
Cracked concrete											
Characteristic bond resistance in cracked concrete C20/25											
<u>Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)</u>											
Temperature range	I: 50 °C / 80 °C II: 72 °C / 120 °C	$\tau_{Rk,cr}$ [N/mm ²]	--- ---	--- ---	6,0 5,0	6,0 5,0	6,0 5,0	5,5 5,0	--- ---	--- ---	--- ---
<u>Hammer-drilling with standard drill bit or hollow drill bit (flooded hole)¹⁾</u>											
Temperature range	I: 50 °C / 80 °C II: 72 °C / 120 °C	$\tau_{Rk,cr}$ [N/mm ²]	--- ---	--- ---	--- ---	5,0 4,0	5,0 4,0	4,5 4,0	--- ---	--- ---	--- ---
Installation safety factors											
Dry and wet concrete	$\gamma_2 = \gamma_{inst}$	[-]	1,2								
Flooded hole			---				1,4 ¹⁾				
¹⁾ Only with coaxial cartridges: 380 ml, 400 ml, 410 ml											
fischer injection system FIS VL									Annex C 4		
Performances Characteristic values for static or quasi-static action under tensile load for anchor rods (uncracked or cracked concrete)											

Table C5: Characteristic values of resistance for fischer internal threaded anchors RG MI in hammer drilled holes; uncracked concrete

Size			M8	M10	M12	M16	M20	
Combined pullout and concrete cone failure								
Calculation diameter		d	[mm]	12	16	18	22	28
Uncracked concrete								
Characteristic bond resistance in uncracked concrete C20/25								
Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)								
Temperature range	I: 50 °C / 80 °C	$\tau_{Rk,ucr}$	[N/mm ²]	10,5	10,0	9,5	9,0	8,5
	II: 72 °C / 120 °C			9,0	8,0	8,0	7,5	7,0
Hammer-drilling with standard drill bit or hollow drill bit (flooded hole) ¹⁾								
Temperature range	I: 50 °C / 80 °C	$\tau_{Rk,ucr}$	[N/mm ²]	10,0	9,0	9,0	8,5	8,0
	II: 72 °C / 120 °C			7,5	6,5	6,5	6,0	6,0
Installation safety factors								
Dry and wet concrete		$\gamma_2 = \gamma_{inst}$	[-]	1,2				
Flooded hole				1,4 ¹⁾				

¹⁾ Only with coaxial cartridges: 380 ml, 400 ml, 410 ml

fischer injection system FIS VL

Performances

Characteristic values for static or quasi-static action under tensile load for fischer internal threaded anchors RG MI and reinforcing bars (uncracked concrete)

Annex C 5

Table C6: Displacements for anchor rods

Size		M6	M8	M10	M12	M16	M20	M24	M27	M30
Displacement-Factors for tensile load ¹⁾										
Uncracked concrete; Temperature range I, II										
δ _{N0} -Faktor	[mm/(N/mm ²)]	0,09	0,09	0,09	0,10	0,10	0,10	0,10	0,11	0,12
δ _{N∞} -Faktor		0,10	0,10	0,10	0,12	0,12	0,12	0,12	0,13	0,13
Cracked concrete; Temperature range I, II										
δ _{N0} -Faktor	[mm/(N/mm ²)]	---	---	0,12	0,12	0,13	0,13	---	---	---
δ _{N∞} -Faktor		---	---	0,27	0,30	0,30	0,30	---	---	---
Displacement-Factors for shear load ²⁾										
Uncracked or cracked concrete; Temperature range I, II										
δ _{V0} -Faktor	[mm/kN]	0,11	0,11	0,11	0,10	0,10	0,09	0,09	0,08	0,07
δ _{V∞} -Faktor		0,12	0,12	0,12	0,11	0,11	0,10	0,10	0,09	0,09
1) Calculation of effective displacement: $\delta_{N0} = \delta_{N0\text{-Faktor}} \cdot \tau_{Ed}$ $\delta_{N\infty} = \delta_{N\infty\text{-Faktor}} \cdot \tau_{Ed}$ (τ _{Ed} : Design value of the applied tensile stress)					2) Calculation of effective displacement: $\delta_{V0} = \delta_{V0\text{-Faktor}} \cdot V_{Ed}$ $\delta_{V\infty} = \delta_{V\infty\text{-Faktor}} \cdot V_{Ed}$ (V _{Ed} : Design value of the applied shear force)					

Table C7: Displacements for fischer internal threaded anchors RG MI

Size	M8	M10	M12	M16	M20	
Displacement-Factors for tensile load ¹⁾						
Uncracked concrete; Temperature range I, II						
δ _{N0} -Faktor	[mm/(N/mm ²)]	0,10	0,11	0,12	0,13	0,14
δ _{N∞} -Faktor		0,13	0,14	0,15	0,16	0,18
Displacement-Factors for shear load ²⁾						
Uncracked concrete; Temperature range I, II						
δ _{V0} -Faktor	[mm/kN]	0,12	0,12	0,12	0,12	0,12
δ _{V∞} -Faktor		0,14	0,14	0,14	0,14	0,14
1) Calculation of effective displacement: $\delta_{N0} = \delta_{N0\text{-Faktor}} \cdot \tau_{Ed}$$\delta_{N\infty} = \delta_{N\infty\text{-Faktor}} \cdot \tau_{Ed}$$(\tau_{Ed}: \text{Design value of the applied tensile stress})$ 2) Calculation of effective displacement: $\delta_{V0} = \delta_{V0\text{-Faktor}} \cdot V_{Ed}$$\delta_{V\infty} = \delta_{V\infty\text{-Faktor}} \cdot V_{Ed}$$(V_{Ed}: \text{Design value of the applied shear force})$						

fischer injection system FIS VL

Performances

Displacements for anchor rods and fischer internal threaded anchors RG MI

Annex C 6