


1

2

3


4

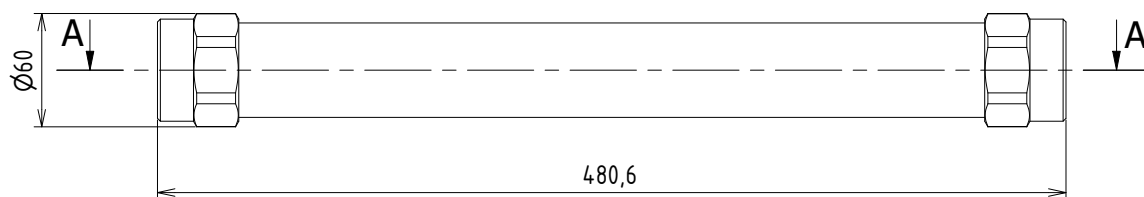

A-A (1 : 4)

Torque 15Nm

Torque 15Nm

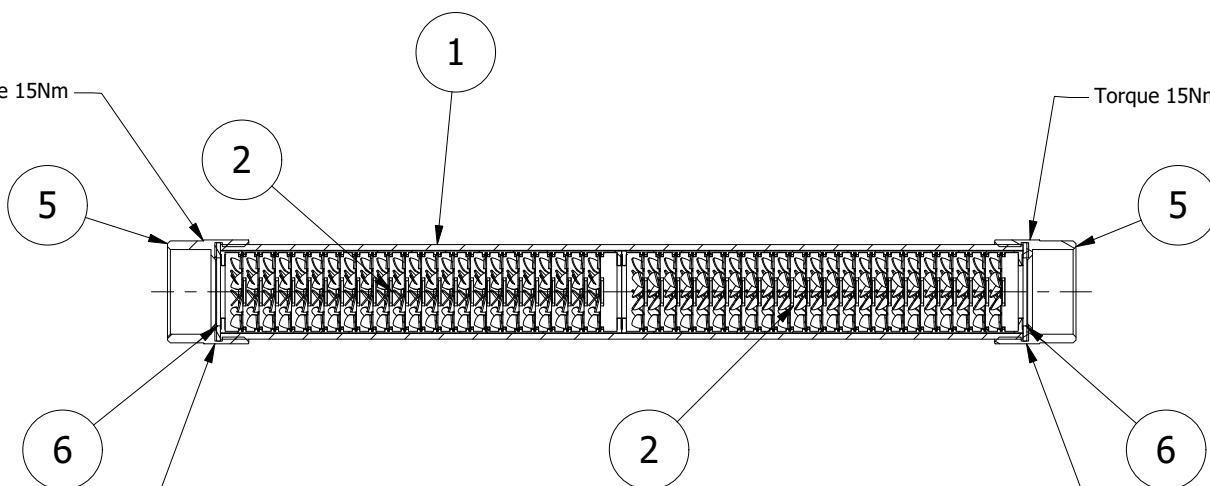

Threads are sealed by liquide seal "SISEAL"

Threads are sealed by liquide seal "SISEAL"

>>> Water Flow Direction >>>

6	Seal - IPS Kalyxx BlueLine		EPDM	S-KB-53x36x3	2	0,004 kg
5	Reduction Cap - IPS Kalyxx G6/4	Ø60 EN 10278	Steel 1.4301	RC-KBL-60/43-G6/4	2	0,266 kg
2	Core Tube - IPS Kalyxx RedLine				2	0,027 kg
1	Tube - Kalyxx BlueLine L	Ø50x3 EN 10217-7	Steel 1.4301	T-KBL-50x3/424.6	1	1,505 kg
Pos.	Title	Semifinished product	Material	Drawing Nr.	Pcs.	Weight

Projection 	Format A4	Scale 1 : 4	Material	Semifinished product	Surface Ra ISO 1302	Tolerances ISO 2768 mK
Department SAT R&D	Designed by Ing. Michal Špak	Date 15. 3. 2018	Approved	Roughness		



**Swiss
Aqua
Technologies**

Title

IPS Kalyxx RedLine G6/4

Drawing Nr.

IPS-KR-G6/4

Weight (kg)
2,413 kg

Sheet:
1/1